


Cat.5e F/UTP PVC, LSZH, PE 4x2x24 AWG



Application

This data cable range is designed for analogue and digital signal transmission in audio, video and data applications in data communication systems supporting 100 MHz, 1.0 Gbit/s 1 Gigabit Ethernet.

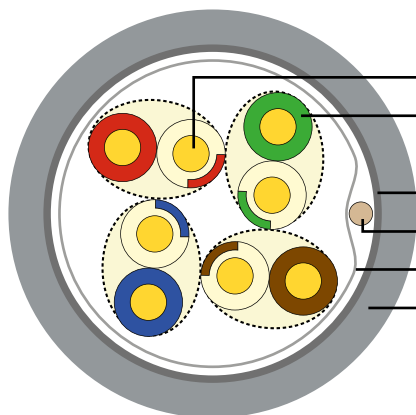

Cable structure

- **Conductor:** Copper wire 24 AWG
- **Insulation:** HDPE in compliance with TIA 568 insulation colour coding
- **Screen:** Pet tape min. 100% coverage
- **A tinned copper drain wire, Ø 26AWG**
- **Al-Pet tape** min. 100% coverage
- **Sheath:**
LSZH/LS0H RAL 2003 Orange
PVC RAL 7001 Grey
PE RAL 9011 Black

Standards

ISO/IEC 11801-1, IEC 61156-5
EN 50288-2-1
ANSI EIA/TIA 568.2-D

