

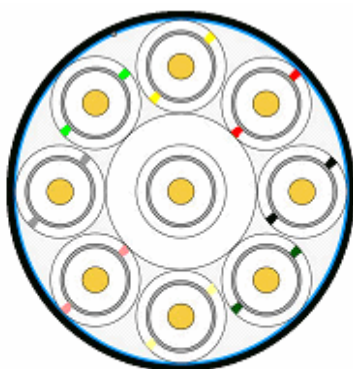
**Description**

Multipair coaxial cable - 75 Ohm

Coaxial Cables

**CAVEL®**

since 1968

**Data Sheet****9X17VATCM****Class CPR acc. to UE 305/2011 (DoP)**

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

**Standards**

EN 50117-2-5

**Construction data**

Polyester film spirally wrapped

(Pet)

**Attached Data Sheet****Sheath Colour**

17VATC

white (PVC)  
 white with two gray bands (RAL 7001)  
 white with two yellow bands (RAL 1021)  
 white with two yellow bands (RAL 1013)  
 white with two green bands (RAL 6018)  
 white with two green bands (RAL 6029)  
 white with two red bands (RAL 3000)  
 white with two red bands (RAL 3015)  
 white with two black bands (PVC)

Diameter under sheath		24,85 ± 0,20	mm
Outer sheath of Thermoplastic material - black - halogen free and flame retardant	(LSZH)	Ø 26,20 ± 0,30	mm
Zinc-plated steel rip cord	(FeZn)	Ø 0,40	mm

Printed each meter by yellow ink-jet :

**CAVEL 9x17VAtCM/PH POUR INTERIEUR-EXTERIEUR MADE IN ITALY 75 Ohm Euroclass Eca**  
**EN50117-2-5 CEI-UNEL 36762 C-4 (U0 =400V) gggaan - m**

(gggaan=batch number m=meter marking)

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****Alberto Scardovi**

**Description**

Multipair coaxial cable - 75 Ohm

**Data Sheet****9X17VATCM****Physical data**

Weight of copper conductors	132,32	kg/km
Total weight of cable	580,77	kg/km
Minimum bending radius (single/repeated bending)	130/260	mm
Max.Tensile Strength	1.400	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

**Connectors**

<b>BNCC703</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F703</b>	Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>F90</b>	Series F Crimp, F Crimp, for INDOOR installation
<b>FA17</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FA703</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC7.0QM</b>	Series F Compression, Quick Mount, for OUTDOOR installation
<b>FC703</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCEM7.0C</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
<b>FCPO5.1C</b>	Series F Compression, Ø 5,1 Push-On, for OUTDOOR installation, nitin-plated brass
<b>FR703</b>	Series F Crimp, F crimp, "Rapid", for INDOOR installation
<b>IECF5.1C</b>	Series IEC (toolless), female, no tool, for INDOOR installation
<b>IECF90C</b>	Series IEC (toolless), Ø 5,1 90° female, for INDOOR installation
<b>IECF703</b>	Series IEC Compression, female, no tool, for OUTDOOR installation
<b>IECM5.1C</b>	Series IEC (toolless), male, no tool, for INDOOR installation
<b>IECM90C</b>	Series IEC (toolless), Ø 5,1 90° male, for INDOOR installation
<b>IECM703</b>	Series IEC Compression, male, for OUTDOOR installation
<b>FC703C</b>	Series F Compression, F Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****Alberto Scardovi**

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

**Data Sheet****17VATC**

9X17VATCM

**Class CPR acc. to UE 305/2011 (DoP)****Eca**

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

**Standards**

EN 50117-2-4

**Construction data**

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,80 ± 0,10	mm
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		45	%
Outer sheath of Polyvinylchloride - white (PVC) - lead-free	(PVC)	Ø 6,80 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL 17VATC/PH MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V)**  
**gggaan m**

(ggg=day)(aa=year)(n=batch) (m=meter marking)

**Physical data**

Weight of copper conductors	14,45	kg/km
Total weight of cable	40,42	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

**Electrical data**

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km
Outer conductor resistance		22	Ohm/km
Loop resistance		40	Ohm/km
Sheat Insulation voltage (spark test)		3	kV
Maximum current (Ieff)		8	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****PierPaolo Piccinini**

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable



## Data Sheet

**17VATC**

9X17VATCM

1000 - 2000 MHz >26 dB  
 2000 - 3000 MHz >22 dB

Screening Attenuation (SA)

SA-Class A

Shield Transfer Impedance (Zt)

Zt-Class C

30 - 1000 MHz &gt;85 dB

5 - 30 MHz

&lt; 27 mΩ/m

1000 - 2000 MHz &gt;80 dB

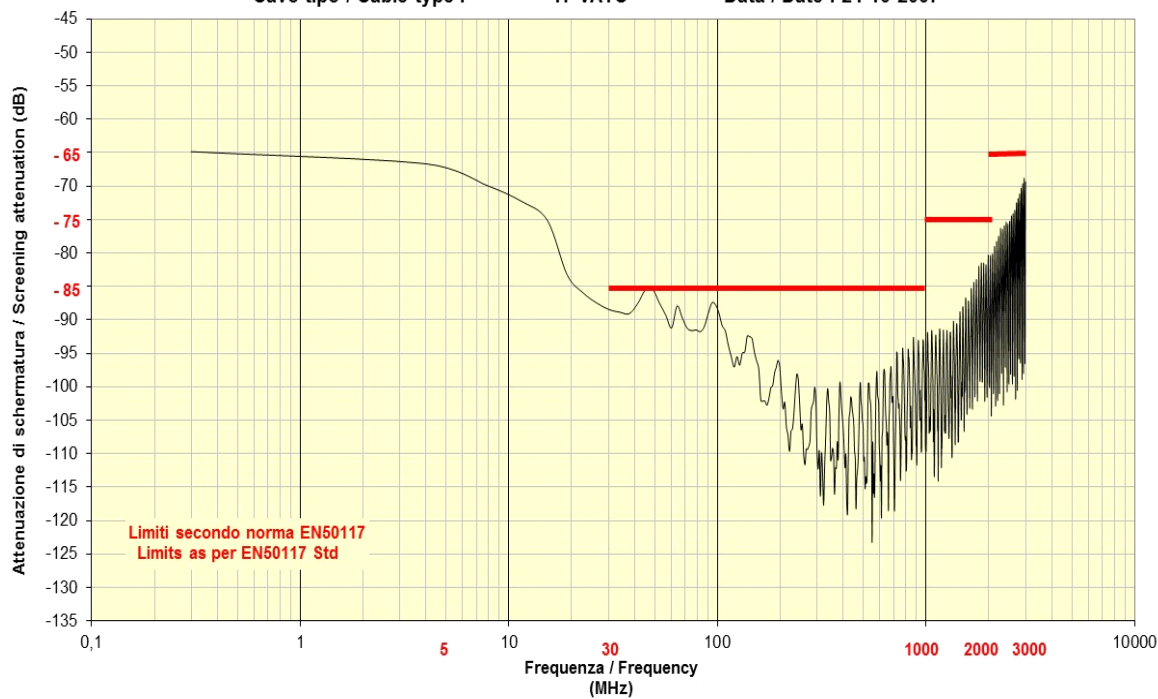
2000 - 3000 MHz &gt;70 dB

## Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type : 17 VATC

Data / Date : 24-10-2007

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

PierPaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

**Data Sheet****17VATC**

9X17VATCM

**Connectors**

<b>BNCC703</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F703</b>	Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>F90</b>	Series F Crimp, F Crimp, for INDOOR installation
<b>FA17</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FA703</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC7.0QM</b>	Series F Compression, Quick Mount, for OUTDOOR installation
<b>FC703</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCEM7.0C</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
<b>FCPO5.1C</b>	Series F Compression, Ø 5,1 Push-On, for OUTDOOR installation, nitin-plated brass
<b>FR703</b>	Series F Crimp, F crimp, "Rapid", for INDOOR installation
<b>IECF5.1C</b>	Series IEC (toolless), female, no tool, for INDOOR installation
<b>IECF90C</b>	Series IEC (toolless), Ø 5,1 90° female, for INDOOR installation
<b>IECFC703</b>	Serie IEC Compression, female, no tool, for OUTDOOR installation
<b>IECM5.1C</b>	Series IEC (toolless), male, no tool, for INDOOR installation
<b>IECM90C</b>	Series IEC (toolless), Ø 5,1 90° male, for INDOOR installation
<b>IECMC703</b>	Serie IEC Compression, male, for OUTDOOR installation
<b>FC703C</b>	Series F Compression, F Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****PierPaolo Piccinini**